




# DIN 15233

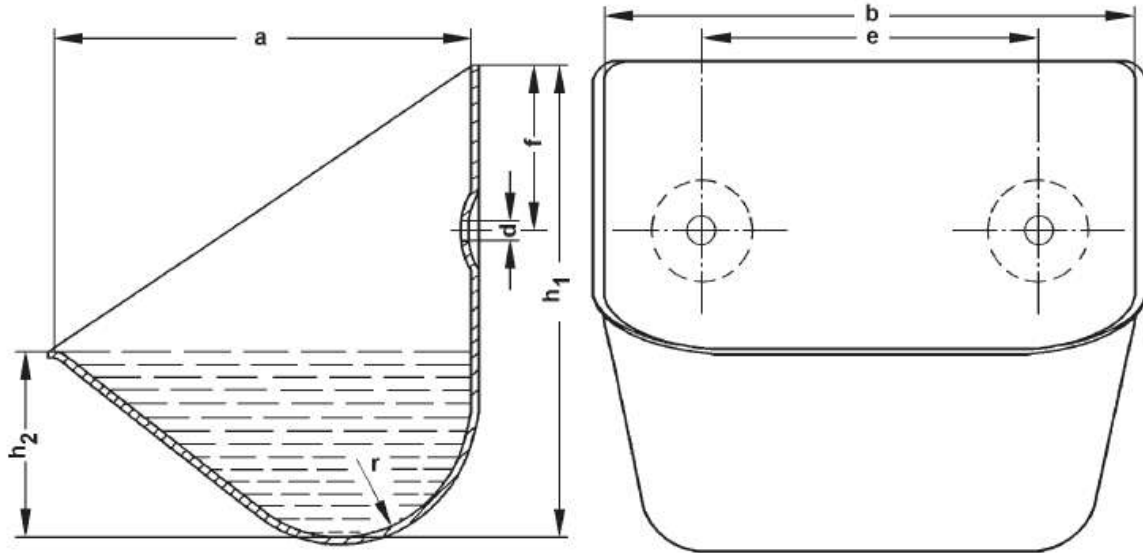

Abmessungen								
b mm	a mm	h1 mm	h2 mm	Kapazität in Liter	Lochabstand	Gewicht nach Blechstärke		
						2 mm	3 mm	
160	140	160	63	1,00	80	1,90		
160	160	180	71	1,10	80	2,17		
200	160	180	71	1,50	125	2,55	3,5	
250	180	200	80	2,40	2 x 80	3,35	4,5	
250	200	224	90	2,55	2 x 80	3,94	5,26	
315	200	224	90	3,80	2 x 112	4,55	6,1	
400	224	250	100	6,00	3 x 100	6,10	8,1	
500	250	280	112	9,50	4 x 100		11,5	
630	280	315	125	15,00	5 x 100		16,1	
800	315	355	140	23,60	Nach Wunsch		22	
1000	355	400	160	37,50	Nach Wunsch		30	

Werkstoffe: St, V2A, V4A, Aluminium

Sonderausführungen wie Randverstärkungen, Sonderlochungen und Veredlungen sind auf Wunsch möglich

